

LH


LH70/71 SERIES

High performance counter flexibly adapting to the diverse field uses with its compact size

- Counter for Milling machine (LH70/71) and Lathe(LH71-3)
- Display Resolution Switching
- Machine error compensation
- Data Storage, ● Reset/Preset/Restart
- Detecting Reference Point of Measurement Unit
- Program function ● Multi datum point ● Scaling
- Milling function (Bolt hole circle / Easy R cutting / Line hole)
- Lathe function (Tool coordinating / Adding function)



Dimensions

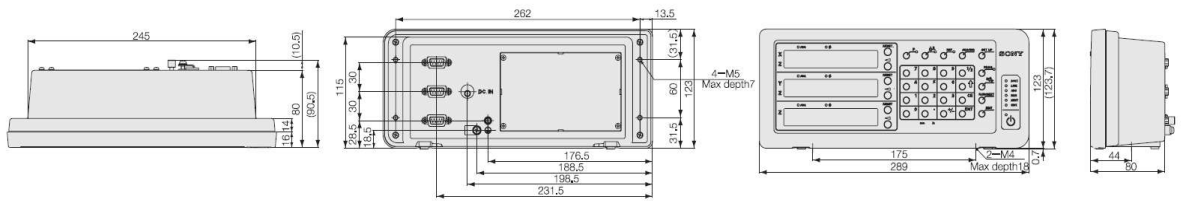

Unit : mm/inch

Specifications

Common Specifications

Model	LH71-1	LH71-2	LH71-3
Display	7 digits and minus display, Color amber		
Connectable measuring unit	GB-ER, SJ300 series, SJ700A, PL20C series (Direct) DG-B (Necessary to use the conversion adaptor which is sold separately.)		
Measuring unit input resolution	Standard: 0.1 μm, 0.5 μm, 1 μm, 5 μm, 10 μm, 1 s, 10 s, 1 min, 10 min Expanded: 100 μm, 50 μm, 25 μm, 20 μm, 2 μm, 0.05 μm and 1 degree can be added.		
Display resolution	Measuring unit input resolution or higher and diameter display (except for angle display)		
Input signal	A/B quadrature signal, Z signal (Conforms to EIA-422.)		
Minimum input phase difference	100 ns		
Quantization error	±1 count		
Alarm display	Measuring unit disconnected, Excess speed, Maximum display amount exceeded, Power failure, Error in stored data		
Reset	Resettable by key switch		
Preset	It is possible to store/call 3 kinds of numbers.		
Reference point detection	The reference point of the measuring unit can be detected, and the datum point can be relocated (during connection of measuring unit with a reference point)		
Data storage	The value displayed before the power was turned off and setting values are stored		
Linear error compensation	A fixed compensation is applied to the measuring unit's count value. Compensation amount Standard: ±600 μm/m (Expanded: ±1000 μm/m)		
Segmented error compensation	The movement range of the measuring unit with a reference point can be divided into a maximum of 32 sections, and error compensation is performed for each of these sections. Compensation amount: ±600 μm (at each section)(LH71 only)		
Scaling	Scaling factor: 0.100000 to 9.999999(LH71 only)		
Program	Machining coordinates can be programmed (number of program steps: 850 max.) 1. Manual programming by key switch 2. Automatic programming by playback 3. Mirror image during program execution 4. A canned cycle (bolt hole, line hole, simple R cutting) can be inserted in the program. (LH71 only)		
Angle display	Can be displayed as an angle value when the Digiruler is pasted to the arc surface, and the diameter and Digiruler resolution are entered		
Sleep	The display is turned off when no operations are made for a preset time. (The time can be set.)		
Power supply	DC 12 V Rating 0.75 A Max, 1 A AC 100 to 240 V ±10% (When using AC adaptor which is sold separately.)		
Power consumption	Max. 32 VA (connected at AC power supply)		
Operating temperature range	0 to 40°C (no condensation)		
Storage temperature range	-20 to 60°C (no condensation)		
Mass	Approx. 1.5 kg		

When the LH70/71 general-purpose applications or milling machine function are selected (General setting in the model type selection mode of the basic settings)

Model	LH70-1	LH71-1	LH70-2	LH71-2	LH70-3	LH71-3
Display	1-axis		2-axis		3-axis	
Multi datum point	10	150	10	150	10	150
Bolt hole circle	—		Displays coordinates for opening equidistant holes along the perimeter of a designated diameter			
Simple R cutting	—		Display coordinates for simple R cutting			
Line hole	—		Displays coordinates for opening equidistant holes along a designated straight line(LH71 only)			

When the LH70/71 lathe function is selected (Lathe setting in the model type selection mode of the basic settings)

Model	LH70-3	LH71-3
Display axes	2-axis display (2-axis or 3-axis input)	
Tool offset	12	99
Measuring unit input addition	2-axis addition display is available	
Display hold	The displayed value can be held and the tool coordinate entered.	

LH


LH72

High performance counter for lathes flexibly adapting to diverse field uses with its compact size

- Counter for Lathe(LH72-3)
- Display Resolution Switching
- Machine error compensation
- Data Storage.
- Reset/Preset/Restart
- Detecting Reference Point of Measurement Unit
- Program function ● Scaling
- Lathe function (Tool coordinating / Adding function)



Dimensions

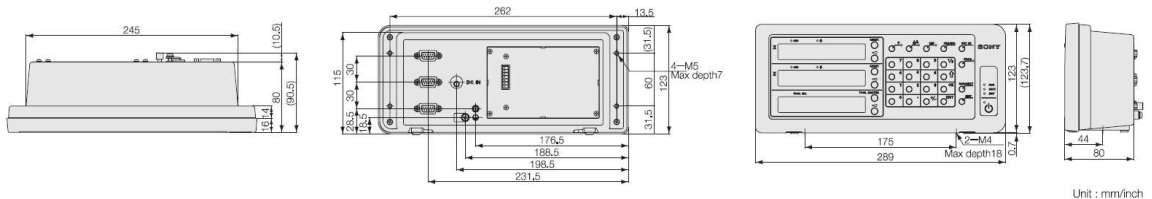

Specifications

Common Specifications

Model	LH72-3
Display	7 digits and minus display, Color amber
Connectable measuring unit	GB-ER, SJ300 series, SJ700A, PL20C series (Direct) DG-B (Necessary to use the conversion adaptor which is sold separately.)
Measuring unit input resolution	Standard: 0.1 μ m, 0.5 μ m, 1 μ m, 5 μ m, 10 μ m, 1 s, 10 s, 1 min, 10 min Expanded: 100 μ m, 50 μ m, 25 μ m, 20 μ m, 2 μ m, 0.05 μ m and 1 degree can be added.
Display resolution	Measuring unit input resolution or higher and diameter display (except for angle display)
Input signal	A/B quadrature signal, Z signal (Conforms to EIA-422.)
Minimum input phase difference	100 ns
Quantization error	± 1 count
Alarm display	Measuring unit disconnected, Excess speed, Maximum display amount exceeded, Power failure, Error in stored data
Reset	Resettable by key switch or remote reset.
Preset	It is possible to store/recall 3 kinds of numbers.
Reference point detection	The reference point of the measuring unit can be detected, and the datum point can be relocated (during connection of measuring unit with a reference point)
Data storage	The value displayed before the power was turned off and setting values are stored
Linear error compensation	A fixed compensation is applied to the measuring unit's count value. Compensation amount Standard: ± 600 μ m/m (Expanded: ± 1000 μ m/m)
Segmented error compensation	The movement range of the measuring unit with a reference point can be divided into a maximum of 32 sections, and error compensation is performed for each of these sections. Compensation amount: ± 600 μ m (at each section)
Scaling	Scaling factor: 0.100000 to 9.999999
Program	Machining coordinates can be programmed (number of program steps: 850 max.) 1. Manual programming by key switch 2. Automatic programming by playback 3. Mirror image during program execution 4. A canned cycle (bolt hole, line hole, simple R cutting) can be inserted in the program. (LH71A only)
Angle display	Can be displayed as an angle value when the Digiruler is pasted to the arc surface, and the diameter and Digiruler resolution are entered
Sleep	The display is turned off when no operations are made for a preset time. (The time can be set.)
Power supply	DC 12 V Rating 0.75 A Max. 1 A AC 100 to 240 V $\pm 10\%$ (When using AC adaptor which is sold separately.)
Power consumption	Max. 32 VA (connected at AC power supply)
Operating temperature range	0 to 40°C (no condensation)
Storage temperature range	-20 to 60°C (no condensation)
Mass	Approx. 1.5 kg

When the lathe function is selected (Lathe setting in the model type selection mode of the basic settings)

Model	LH72-3
Display axes	2-axis display (2-axis or 3-axis input)
Tool offset	99
Measuring unit input addition	2-axis addition display is available
Display hold	The displayed value can be held and the tool coordinate entered.

Diese Daten können jederzeit ohne Vorankündigung geändert werden

WayCon Positionsmesstechnik GmbH

e-mail: info@waycon.de

internet: www.waycon.de

Head Office

Mehlbeerenstr. 4

82024 Taufkirchen

Tel. +49 (0)89 67 97 13-0

Fax +49 (0)89 67 97 13-250

Office Köln

Auf der Pehle 1

50321 Brühl

Tel. +49 (0)2232 56 79 44

Fax +49 (0)2232 56 79 45

WayCon

Positionsmesstechnik